


DV M TNC 255 (951 300)


- Prewired combined type 1 and type 2 spark-gap-based lightning current and surge arrester consisting of a base part and plug-in protection modules
- Maximum system availability due to RADAX Flow follow current limitation
- Capable of protecting terminal equipment



Figure without obligation



Basic circuit diagram DV M TNC 255

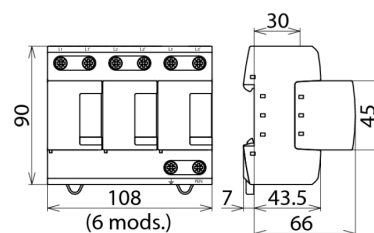

Dimension drawing DV M TNC 255

Modular combined lightning current and surge arrester for protecting TN-C systems against surges.

| Type | DV M TNC 255 |
|---|--|
| Part No. | 951 300 |
| SPD according to EN 61643-11 / IEC 61643-11 | type 1 + type 2 / class I + class II |
| Energy coordination with terminal equipment (≤ 5 m) | type 1 + type 2 + type 3 |
| Nominal voltage (a.c.) (U_N) | 230 / 400 V (50 / 60 Hz) |
| Max. continuous operating voltage (a.c.) (U_C) | 264 V (50 / 60 Hz) |
| Lightning impulse current (10/350 μ s) [L1+L2+L3-PEN] (I_{total}) | 75 kA |
| Specific energy [L1+L2+L3-PEN] (W/R) | 1.40 MJ/ohms |
| Lightning impulse current (10/350 μ s) [L-PEN] (I_{imp}) | 25 kA |
| Specific energy [L-PEN] (W/R) | 156.25 kJ/ohms |
| Nominal discharge current (8/20 μ s) [L-PEN]/[L1+L2+L3-PEN] (I_n) | 25 / 75 kA |
| Voltage protection level (U_P) | ≤ 1.5 kV |
| Follow current extinguishing capability (a.c.) (I_{fc}) | 50 kA _{rms} |
| Follow current limitation / Selectivity | no tripping of a 20 A gG fuse up to 50 kA _{rms} (prosp.) |
| Response time (t_A) | ≤ 100 ns |
| Max. backup fuse (L) up to $I_K = 50$ kA _{rms} | 315 A gG |
| Max. backup fuse (L-L') | 125 A gG |
| Temporary overvoltage (TOV) (U_T) – Characteristic | 440 V / 120 min. – withstand |
| Operating temperature range [parallel] / [series] (T_U) | -40 °C ... +80 °C / -40 °C ... +60 °C |
| Operating state / fault indication | green / red |
| Number of ports | 1 |
| Cross-sectional area (L1, L1', L2, L2', L3, L3', PEN, \pm) (min.) | 10 mm ² solid / flexible |
| Cross-sectional area (L1, L2, L3, PEN) (max.) | 50 mm ² stranded / 35 mm ² flexible |
| Cross-sectional area (L1', L2', L3', \pm) (max.) | 35 mm ² stranded / 25 mm ² flexible |
| For mounting on | 35 mm DIN rails acc. to EN 60715 |
| Enclosure material | thermoplastic, red, UL 94 V-0 |
| Place of installation | indoor installation |
| Degree of protection | IP 20 |
| Capacity | 6 module(s), DIN 43880 |
| Approvals | KEMA, VDE, UL, VdS |
| Extended technical data: | For use in switchgear installations with prospective short-circuit currents of more than 50 kA _{rms} (tested by the German VDE) |
| – Max. prospective short-circuit current | 100 kA _{rms} (220 kA _{peak}) |
| – Limitation / Extinction of mains follow currents | up to 100 kA _{rms} (220 kA _{peak}) |
| – Max. backup fuse (L) up to $I_K = 100$ kA _{rms} | 315 A gG |
| Weight | 970 g |
| Customs tariff number | 85363030 |
| GTIN | 4013364108134 |
| PU | 1 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.