


Technical data sheet

Lightning current and surge arrester, 3-pin + NPE with remote signalling

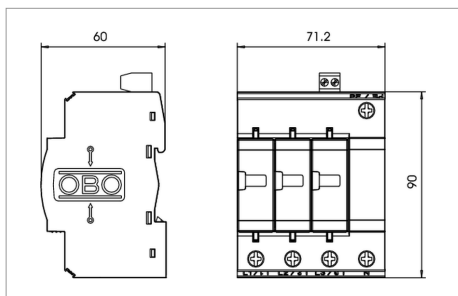

V 50-B+C/3+NPE+FS: combination arrester set, lightning and surge arrester type 1+2 to DIN EN 61643-11 (B+C to VDE 0675 part 6).

- For lightning current equipotential bonding to VDE 0185-305 (IEC 62305)
- Lightning current dissipation capacity 12.5 kA (10/350) per pole
- Universally suitable for TN and TT systems
- With new Multibase base with multiple connection terminals
- Complete unit, consisting of cover and base, pre-mounted and ready for connection
- arrester, connectable with dynamic cut-off unit
- With optical function display
- Voltage protection level • Encapsulated, non-extinguishing zinc oxide varistor arrester for use in distributor housing
- Labelled connections
- -FS variant with remote signalling contact (potential-free NO contact)

Application: lightning protection equipotential bonding in buildings which also have external lightning protection of Classes III and IV and in standard distributor housings.

Type	Maximum continuous voltage V	Version	Pack Units	Weight kg/100 pc.	Art.-No.
V50-B+C 1+NPE+FS	280	1+NPE with FS	1	26.100	5093661
V50-B+C 3+NPE+FS	280	3+NPE with FS	1	55.000	5093662

/pc.