


Technical data sheet

Surge arrester, 3-pole + NPE with remote signalling



V 10-C/...: lightning and surge protection device Type 2+3 (Class C+D) to VDE 0675 part 6-11 (DIN EN 61643-11) to overvoltage protection to DIN VDE 0100 part 443.

- With new MultiBase base part and Multi-connection clamps
- Complete unit consisting of upper part and base, pre-mounted and ready for connection
- Suitable for any TN and TT network systems
- Plug-in arrester with dynamic separating device
- With visual function display
- Version FS with remote signalling, potential-free changeover contact, for function monitoring
- High current conductivity and long service life
- Marked connections

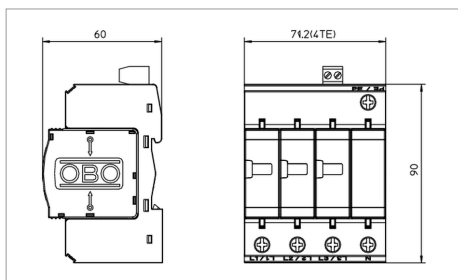

Application example: residential buildings, single-family homes



Type	Maximum continuous voltage V	Version	Pack Units	Weight kg/100 pc.	Art.-No.
V10-C 3+NPE+FS	280	3 + NPE	1	37.900	5094931

/pc.